















T45 (1 3/4") Thread

Button bit

	Dimensions D		Flushing hole (mm)		Buttons (mm)		Angle	Class	Part no.
	mm	in	Front No size	Gauge No size	Front No size	Gauge No size			
 	70	2 3/4	2×8	2×6	4×11	8×11	35°	H	3070T4512
	76	3	2×9	2×7	4×11	8×12	35°	H	3076T4512
	89	3 1/2	2×13	2×8	5×12	8×14	35°	H	3089T4513
	102	4	2×13	–	6×13	8×14	35°	H	30102T4514
 	115	4 1/2	4×13	–	6×14	8×16	35°	H	30115T45F14
 	70	2 3/4	4×8	–	5×10	8×11	35°	M	3070T4513D
	76	3	4×8	–	5×11	8×12	35°	M	3076T4513D
 	89	3 1/2	4×9	–	6×12	8×14	35°	M	3089T4514D
	102	4	4×11	–	6×13	8×14	35°	M	30102T4514D
	115	4 1/2	4×13	–	6×14	8×16	35°	M	30115T4514D
 	70	2 3/4	2×8	2×6	4×11	8×11	35°	H	3070T4512R
	76	3	2×9	2×7	4×12	8×12	35°	H	3076T4512R
 	89	3 1/2	2×11	2×8	6×12	8×14	35°	H	3089T45F14R
	102	4	4×11	–	6×13	8×14	35°	H	30102T45F14R
	115	4 1/2	4×13	–	6×14	8×16	35°	H	30115T45F14R
 	76	3	4×8	–	5×11	8×12	35°	M	3076T4513DR
	89	3 1/2	4×10	–	6×12	8×14	35°	M	3089T4514DR
	102	4	4×11	–	6×13	8×14	35°	M	30102T4514DR
	115	4 1/2	4×13	–	6×14	8×16	35°	M	30115T4514DR

Bench & long hole drilling

Bench & long hole Drilling

T45 (1 3/4")
Thread


Cross bit



Dimensions D		Flushing hole (mm)		Buttons (mm)		Angle	Class	Part no.
mm	in	Front No size	Gauge No size	Front No size	Gauge No size			
76	3	1×8	2×8	-	-	-	-	3276T45
89	3 1/2	1×9	2×9	-	-	-	-	3289T45


Reaming tools

Dome bit

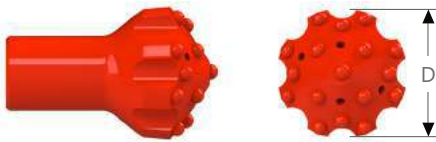

127	5	4×8	2×9	1×14	16×14	35°	-	30127T4517KD
-----	---	-----	-----	------	-------	-----	---	--------------

Cut holes/Dome bit

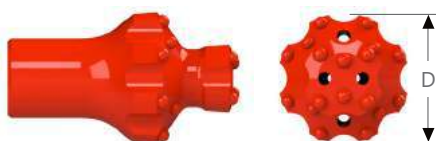

127	5	2×13	2×11	10×13	8×14	35°	-	30127T4518KC
-----	---	------	------	-------	------	-----	---	--------------

Drill rod

Rod Ø45 with threads T45/T45



Dimensions L			Dimensions D		Part no.
mm	ft	in	mm	in	
3050	10	-	45	1 3/4	2045T4530
3660	12	-	45	1 3/4	2045T4536
4270	14	-	45	1 3/4	2045T4542
4880	16	-	45	1 3/4	2045T4548
6100	20	-	45	1 3/4	2045T4561

Rod Ø45 with threads T45/T45 (MF)



1525	5	-	45	1 3/4	2045T45MF15
1830	6	-	45	1 3/4	2045T45MF18
3050	10	-	45	1 3/4	2045T45MF30
3660	12	-	45	1 3/4	2045T45MF36
4270	14	-	45	1 3/4	2045T45MF42


T45 (1 3/4") Thread

Coupling

T45-45



Crossover coupling T45-T38

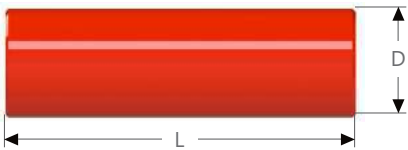

Crossover coupling T45-T51



	Dimensions L			Dimensions D		Part no.
	mm	ft	in	mm	in	
T45-45	207	8	1/8	66	2 3/5	MX-T456620
Crossover coupling T45-T38	215	8	1/2	66	2 1/2	MX-T45T386621
Crossover coupling T45-T51	240	9	1/2	72	2 7/8	MX-T45T517224

Bench & long
hole drilling

“Globe Drilling Industry Experts”

No matter what kinds of soft rock, loose-medium rock, hard rock and any other special formations, just tell us what you need, our special tailored service is waiting for you upon your demand.



MAXDRILL ROCK TOOLS CO., LTD
KEMAICO USA CORP

Add: 9/F, Fuzhong International Plaza, No.72 Xinhua Road, Nanming District,
Guiyang, Guizhou, China

Tel: +86-851-88639105/06 Fax: +86-851-88639108

E-mail: office@kemaico.com info@kemaico.com

Web: www.maxdrillrocktools.com www.kemaico.com www.maxdrill.com.cn